

002-1053-0267 b



# 运输危险性鉴定书

## Hazard Classification and Identification Report for Transport of Goods

### 锂电池类物品

**样品名称 :** 扫描仪 (内置二次锂离子电池组, 电池型号C1222A1, 3.6V, 2750mAh, 9.9Wh)

**Sample name:** IMAGE SCANNER (Including Rechargeable Li-ion Battery, Battery Model C1222A1, 3.6V, 2750mAh, 9.9Wh)

**委托单位 :** 虹光精密工业(苏州)有限公司  
AVTSTON (SUZHOU) CO.,LTD.

**生产单位 :** 虹光精密工业(苏州)有限公司  
AVTSTON (SUZHOU) CO.,LTD.



**上海化工院检测有限公司**  
SHANGHAI INSTITUTE OF CHEMICAL INDUSTRY TESTING CO.,LTD.



# 运输危险性鉴定书

Hazard Classification and Identification Report  
for Transport of Goods

NO. 212300746246190

Page 1/3

样品名称 Sample Name	中文 Chinese	扫描仪 (内置二次锂离子电池组, 电池型号C1222A1, 3.6V, 2750mAh, 9.9Wh)		
	英文 English	IMAGE SCANNER (Including Rechargeable Li-ion Battery, Battery Model C1222A1, 3.6V, 2750mAh, 9.9Wh)		
委托单位 Applicant	虹光精密工业(苏州)有限公司 AVISTON (SUZHOU) CO.,LTD.			
生产单位 Manufacturer	虹光精密工业(苏州)有限公司 AVISTON (SUZHOU) CO.,LTD.			
检验方法、程序 Inspection method and procedure	国际海事组织《国际海运危险货物规则》(2020版) IMO International Maritime Dangerous Goods Code (2020 Edition)			
样品外观 Sample appearance	黑色塑胶外壳 Black Plastics cement shell			
包装件信息 Package information	/			
序号 NO.	电池种类 Battery type	型号 Model	容量Capacity /锂含量Li content	放置方式 Placement
1	可充电锂离子单电芯电池 Rechargeable Li-ion single cell battery	C1222A1	2750mAh 9.9Wh	安装在设备内 Contained in equipment
鉴定 结论 IDENTIFICATION CONCLUSION	1. 危险性识别 (Hazards identification) 锂离子电池。 Lithium ion battery.			
	2. 海运按照国际海事组织《国际海运危险货物规则》办理的类项 (Suggestion according to IMO IMDG Code) 根据特殊规定188, 该物品不受IMO IMDG Code其他条款限制。 The article is not subject to other provisions of IMO IMDG Code according to special provision 188.			
	3. 包装要求 (Packaging requirements) 无。 None.			
检验日期: Inspection Date:		2023-09-27	签发日期: Issue Date:	2023-09-27
			生效日期: Effective Date:	2023-09-27
备注 Comment	/			

批准  
Approver: 王宇

审核  
Checker: 董学胜

主检  
Appraiser: 孙清



# 运输危险性鉴定书

Hazard Classification and Identification Report  
for Transport of Goods

NO. 212300746246190

Page 2/3

序号 No.	检验结果及其他事项 Inspection results and other things
1	<p>本鉴定书所述锂电池按照《国际海运危险货物规则》(2020版) 2.9.4.5规定的质量管理体系进行制造。 Lithium cells and batteries listed in this report were manufactured under the quality management program described in IMDG CODE 2020 EDITION 2.9.4.5.</p>
2	<p>本鉴定书所述锂电池已通过联合国《试验和标准手册》第III部分38.3小节相应测试要求。 Lithium cells and batteries listed in this report are of the types proved to meet the requirements of each applicable test in the UN Manual of Tests and Criteria, Part III, sub-section 38.3. UN38.3试验概要编号 The UN38.3 Test Summary No. (s) 812200700249712 详细信息请扫描右侧二维码。 Please scan the QR code on the right for more information.</p> 
3	<p>设备应装入由适当材料构造的坚固外包装内, 材料的强度和设计与包装的容量和用途相符, 除非装有电池的设备对电池提供了等效保护。 The equipment should be packed in strong outer packagings constructed of suitable material of adequate strength and design in relation to the packaging's capacity and its intended use unless the battery is afforded equivalent protection by the equipment in which it is contained.</p>
4	<p>电池具有适当的防短路措施。 设备固定在外包装内以免移动, 并配备防止发生意外启动的有效手段。 Cells and batteries are properly protected to prevent short circuits. The equipment is secured against movement within the outer packaging and is equipped with an effective means of preventing accidental activation.</p>
5	<p>每个包装件必须标示恰当的锂电池标记。 Each package shall be marked with the appropriate lithium battery mark.</p>
6	/
7	/

-验证码:529004-





# 运输危险性鉴定书

Hazard Classification and Identification Report  
for Transport of Goods

NO. 212300746246190

Page 3/3

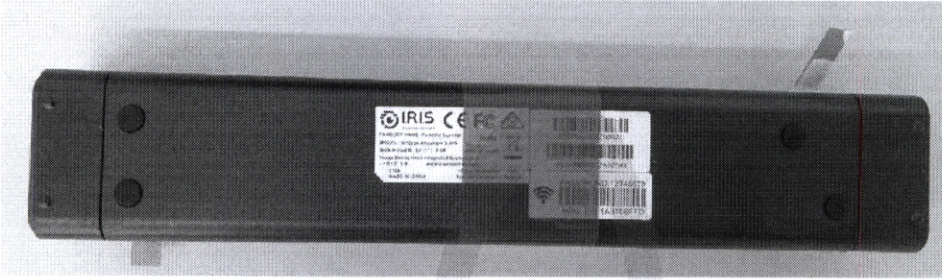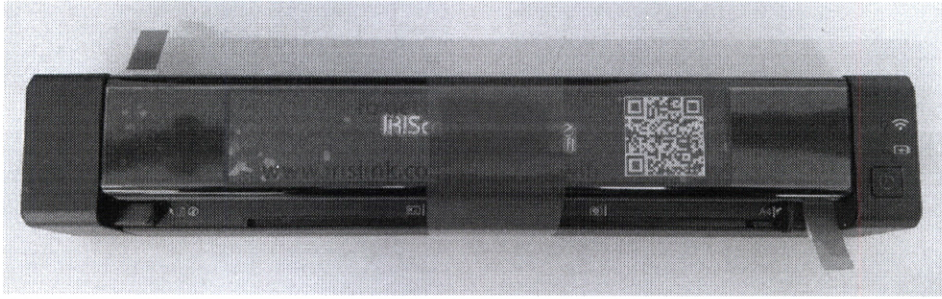

紅色Red(+) 黑色Black(-) 11NR19/66  
二次锂离子电池组Rechargeable Li-ion Battery  
产品型号(Model): C1222A1  
标称电压(Nominal Voltage): 3.6Vdc  
额定容量(Rated Capacity): 2750mAh, 9.9Wh  
充电限制电压(Limited Charging Voltage): 4.2V



C1222A1

\*\*\*报告结束\*\*\*

